


FLOW CONTROL HYDROMETER, SOLENOID CONTROLLED

Model IR-970-M0-55-2W-RV

The BERMAD flow control Hydrometer with solenoid control combines a Woltman-type turbine water meter with a hydraulically operated, diaphragm actuated control valve. Functioning as both a mainline flow meter and a flow control valve, the Hydrometer opens or closes in response to an electric signal and limits the demand to a preset max. The Hydrometer features a magnetically coupled, vacuum-sealed register for precise accumulated volume measurement. An optional pulse output is available to further enhance system capabilities.

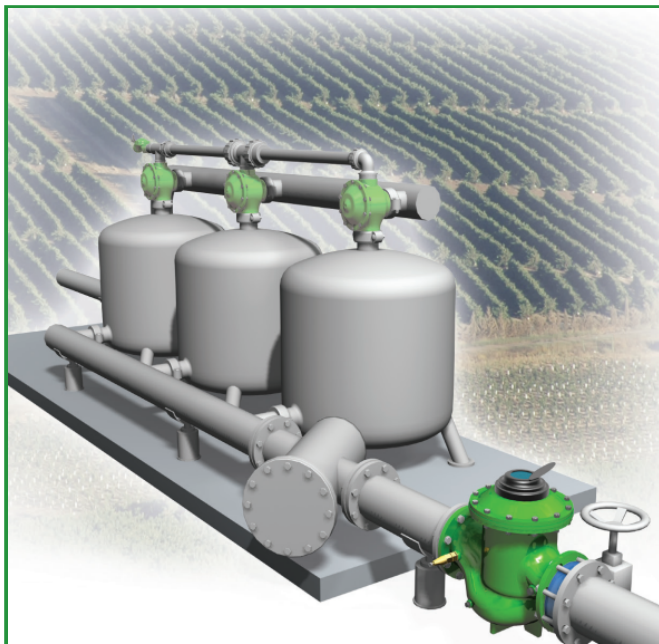

[1] BERMAD Model IR-970-M0-55-2W-RV opens in response to an electric signal, limits fill-up rate and consumer over-demand, and measures flow.

Features & Benefits


- Integrated "All-in-One" Control Valve & Flow Meter
 - Saves space, cost and maintenance
- Line Pressure Driven, Electrically Controlled On/Off
 - Limits fill-up rate and consumer excessive demand
- Magnetic Drive with Vacuum-Sealed Register
 - Water-free gear train mechanism
 - Reed-switch tension free pulse output
 - Various pulse combinations
- Internal Inlet & Outlet Flow Straighteners
 - Saves on straightening distances
 - Maintains accuracy
- Integrated Flow Metering Calibration Device
 - Precise measurement
- Paddle-Type Hydro-Mechanical Flow Pilot
 - Negligible head loss
 - Wide setting range
- User-Friendly Design
 - Easy pressure setting
 - Simple in-line inspection and service


Typical Applications

- Automated Irrigation Systems
- Remote Flow Data Read-Out
- Flow Monitoring & Leakage Control
- Multiple Independent Consumer Systems
- Line Fill-Up Control

Operation:

The Paddle Flow Control Pilot (FCP) **[1]** is hydraulically connected to the Hydrometer Control Chamber **[2]** through the Solenoid **[3]**. When the Solenoid is activated by an electric signal, enabling regulation mode, the FCP throttles the Hydrometer closed if demand exceeds setpoint and modulates it open if demand is lower than setpoint. Deactivating the Solenoid shuts the Hydrometer. The Hydrometer can be manually opened or closed using Solenoid's override feature.





Technical Data

Pressure Rating:
250 psi

Operating Pressure Range:
7-250 psi

Materials

Body & Cover: Ductile Iron
Diaphragm: NR, Nylon fabric reinforced
Seals: NR, Nylon fabric reinforced
Spring: Stainless Steel
Internals: Stainless Steel & Plastic Reinforced Nylon
Impeller: Polypropylene
Pivots and Bearings: Polypropylene
**Other materials are available on request*

Control Loop Accessories

FC Pilot: PC-70-MP
Flow Pilot spring range:
Spring: E-Purple
Flow Velocity (ft/sec): 5-11.5

Tubing and Fittings:
Reinforced Nylon and Brass

AC solenoid:
S-400-3W


DC solenoid:
S-400-3W

DC latch solenoid:
S-402-3W M.B.

**For other solenoids please consult [BERMAD](#)*

Technical Specifications

For other patterns and end connection types,
Please refer to [BERMAD](#) full engineering page.

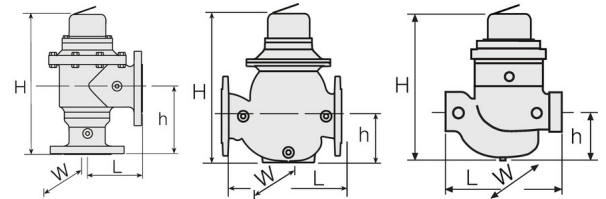

Size	Pattern	End Connection	Weight (Lb)	L (In)	H (In)	h (In)	W	CCDV (Gal)	CV
1½" ; DN40	Globe	Threaded	15.9	9¾	10¾	3¾	5¾	0.04	47
2" ; DN50	Globe	Threaded	16.1	9¾	10¾	3¾	5¾	0.04	53
2" ; DN50	Angle 90°	Threaded	17.8	4¾	13¾	6¾	5¾	0.04	59
3"R ; DN80R	Globe	Threaded	16.1	9¾	10¾	3¾	5¾	0.04	58
3"R ; DN80R	Globe	Flanged	35.3	12¾	11¾	4	7¾	0.04	58
3" ; DN80	Globe	Flanged	50.7	11¾	15	4¾	8¾	0.13	133
3" ; DN80	Angle 90°	Flanged	56.9	6	15¾	7¾	8¾	0.13	146
4" ; DN100	Globe	Flanged	68.3	13¾	17¾	5¾	9¾	0.26	170
4" ; DN100	Angle 90°	Flanged	79.6	7¾	19	8¾	9¾	0.26	208
6" ; DN150	Globe	Flanged	156.5	19¾	23¾	8½	15	1	497
6" ; DN150	Angle 90°	Flanged	169.1	9¾	23	12	15	1	547
8" ; DN200	Globe	Flanged	205	23¾	24¾	9	15	1	636
8" ; DN200	Angle 90°	Flanged	181.8	9¾	23	11	15	1	699

CCDV = Control Chamber Displacement Volume • **Threaded** = BSP & NPT are available.

• Extra length for male Threaded: 1½" Globe = 2.6 (Inch) ; 2" Globe & Angle = 3 (Inch)

Flow Properties

Size	Accuracy	DN40	DN50	DN80R	DN80	DN100	DN150	DN200
Q @ (gpm)		1½"	2"	3"R	3"	4"	6"	8"
Q1 Minimum Flow	±5%	3.5	3.5	5.3	5.3	7.9	17.6	27.7
Q2 Transitional Flow	±2%	5.7	5.7	13.2	13.2	19.8	44	69.6
Q3 Permanent Flow	±2%	110	176	440	440	704	1100	1761
Q4 Maximum Flow (Short Time)	±2%	136	220	550	550	880	1378	2201

*ISO 4604

Pulse Option

Register Type	Electronic			
Size	One pulse per			
	1 Gal	10 Gal	100 Gal	1000 Gal
1½"-4" ; DN40-100	✓	✓	✓	
6"-10" ; DN150-250		✓	✓	✓


- 1 Gallon pulse (only available with electronic register) suitable for flows up to 790 gpm.
- Two parallel pulses are transmitted. other pulse rates are available on request.

Additional Features

Code	Description
ME	Electronic register (upgrade kit is available)

Flow Chart

2-Way circuit "Added Head Loss" (for "V" below 6.5 f/s): 4.5 psi

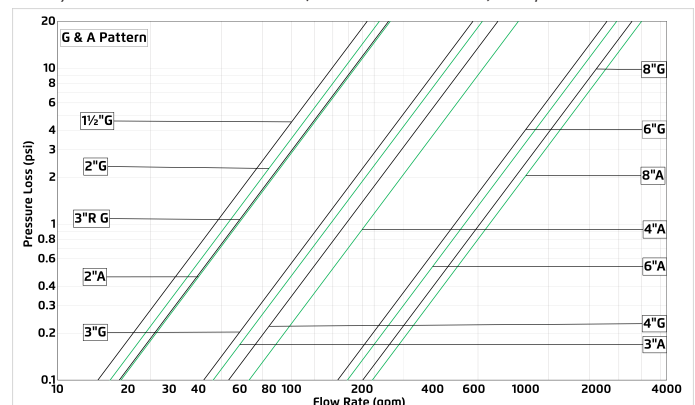

Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{C_v} \right)^2$$

Cv = gpm @ ΔP of 1 psi
 Q = gpm
 ΔP = psi