



FLOW CONTROL HYDROMETER

Model IR-970-ME-2W-KVZ

The BERMAD flow control Hydrometer with manual selector combines a Woltman-type turbine water meter with a hydraulically operated, diaphragm-actuated control valve. Functioning as both a mainline flow meter and a flow control valve, it limits the demand to a preset max. The Hydrometer features an electronic register for precise measurement of accumulated volume and instantaneous flow and a pulse output for enhanced monitoring and control applications.



[1] BERMAD Model IR-970-ME-2W-KVZ limits fill-up rate and over-demand, and measures flow.

Features & Benefits


- Integrated "All-in-One" Control Valve & Flow Meter
 - Saves space, cost and maintenance
- Line Pressure Driven, Hydraulically Controlled
 - Limits fill-up rate and consumer excessive demand
- Magnetic Drive with BERMAD Universal E-Register
 - Support metric & imperial units of measurement
 - Instant flow rate display
 - Forward and reverse flow indication
 - Data logging capabilities
 - Fast pulse output rate
- Internal Inlet & Outlet Flow Straighteners
 - Saves on straightening distances
 - Maintains accuracy
- Paddle-Type Hydro-Mechanical Flow Pilot
 - Negligible head loss
 - Wide setting range
- User-Friendly Design
 - Easy flow setting
 - Simple in-line inspection and service

Typical Applications

- Automated Irrigation Systems
- Flow Monitoring & Leakage Control
- Multiple Independent Consumer Systems
- Line Fill-Up Control
- Irrigation Machines
- Filter Stations

Operation:

The Paddle Flow Control Pilot (FCP) [1] hydraulically connects to the Hydrometer Control Chamber [2] through the Manual Selector [3]. When Manual Selector is switched to AUTO, the FCP throttles the Hydrometer closed if demand exceeds setpoint and modulates it open if demand is lower than setpoint. Switching the Manual Selector to CLOSE shuts the Hydrometer.





Technical Data

Pressure Rating:
150 psi

Operating Pressure Range:
7-150 psi

Materials

- Body & Cover:** Ductile Iron
 - Diaphragm:** NR, Nylon fabric reinforced
 - Seals:** NR, Nylon fabric reinforced
 - Spring:** Stainless Steel
 - Internals:** Stainless Steel & Plastic Reinforced Nylon
 - Impeller:** Polypropylene
 - Pivots and Bearings:** Polypropylene
- *Other materials are available on request*

Control Loop Accessories


- FC Pilot:** PC-70-P
- Flow Pilot spring range:**
- Spring:** E-Purple
- Flow Velocity (ft/sec):** 5-11.5

Tubing and Fittings:

Polyethylene and Polypropylene

Technical Specifications

For other patterns and end connection types, Please refer to [BERMAD](#) full engineering page.

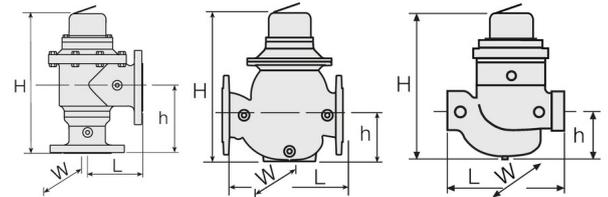

Size	Pattern	End Connection	Weight (Lb)	L (In)	H (In)	h (In)	W	CCDV (Gal)	CV
1½" ; DN40	Globe	Threaded	15.9	9¾	10¾	3¾	5¾	0.04	47
2" ; DN50	Globe	Threaded	16.1	9¾	10¾	3¾	5¾	0.04	53
2" ; DN50	Angle 90°	Threaded	17.8	4¾	13¾	6¾	5¾	0.04	59
3"R ; DN80R	Globe	Threaded	16.1	9¾	10¾	3¾	5¾	0.04	58
3"R ; DN80R	Globe	Flanged	35.3	12¾	11¾	4	7¾	0.04	58
3" ; DN80	Globe	Flanged	50.7	11¾	15	4¾	8¾	0.13	133
3" ; DN80	Angle 90°	Flanged	56.9	6	15¾	7¾	8¾	0.13	146
4" ; DN100	Globe	Flanged	68.3	13¾	17¾	5¾	9¾	0.26	170
4" ; DN100	Angle 90°	Flanged	79.6	7¾	19	8¾	9¾	0.26	208

CCDV = Control Chamber Displacement Volume • **Threaded** = BSP & NPT are available.

• Extra length for male Threaded: 1½" Globe= 2.6 (Inch) ; 2" Globe & Angle= 3 (Inch)

Flow Properties

Size	Accuracy	DN40	DN50	DN80R	DN80	DN100
Q @ (gpm)		1½"	2"	3"R	3"	4"
Q1 Minimum Flow	±5%	3.5	3.5	5.3	5.3	7.9
Q2 Transitional Flow	±2%	5.7	5.7	13.2	13.2	19.8
Q3 Permanent Flow	±2%	110	176	440	440	704
Q4 Maximum Flow (Short Time)	±2%	136	220	550	550	880

*ISO 4604


Pulse Option

Register Type	Electronic			
	One pulse per			
Size	1 Gal	10 Gal	100 Gal	1000 Gal
1½"-4" ; DN40-100	✓	✓	✓	

• 1 Gallon pulse suitable for flows up to 790 gpm.

Flow Chart

2-Way circuit "Added Head Loss" (for "V" below 6.5 f/s): 4.5 psi

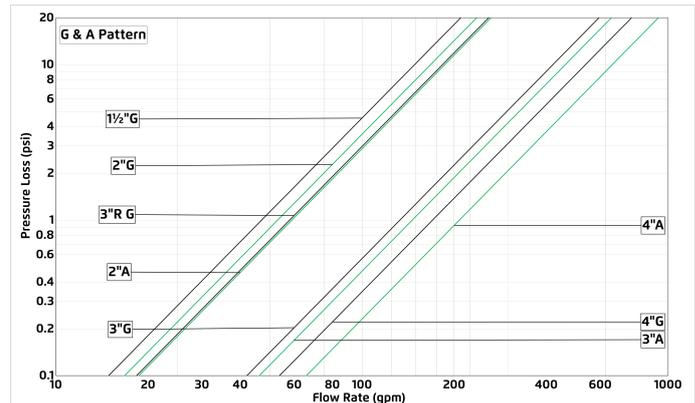

Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{CV} \right)^2$$

$CV = \text{gpm @ } \Delta P \text{ of } 1 \text{ psi}$
 $Q = \text{gpm}$
 $\Delta P = \text{psi}$