

QUICK PRESSURE RELIEF VALVE

Model 73Q

Hydraulically operated, diaphragm actuated quick pressure relief valve that relieves excessive system pressure when such pressure rises above a pre-set value. It responds immediately, accurately, and with high repeatability to a rise in system pressure by opening fully. It also provides smooth drip tight closing.

The BERMAD 700 SIGMA EN/ES series valves are hydraulic globe valves with a raised seat and double chamber actuator. They provide unobstructed flow, effective high-pressure modulation, and minimal cavitation, complying with various potable water standards.




Features & Benefits



- Designed to - Stand up to the toughest conditions
 - Excellent anti-cavitation properties
 - Wide flow range
 - High stability and accuracy
 - Drip tight sealing
- Double chamber design
 - Moderated valve reaction
 - Protected diaphragm
 - Optional operation in very low pressure
 - Moderated closing curve
- Flexible design - Easy addition of features
- Obstacle free flow pass
- V-Port throttling plug (optional) - Very stable at low flow
- Compatible with various standards
- High quality materials
- In-line serviceable - Easy maintenance

Typical Applications

- Pressure reducing systems - Protection against pressure rise during sudden demand stoppage or failure
- Old pipe systems - Installed at sensitive spots and line ends to protect against bursts during pressure surges

Typical Installation

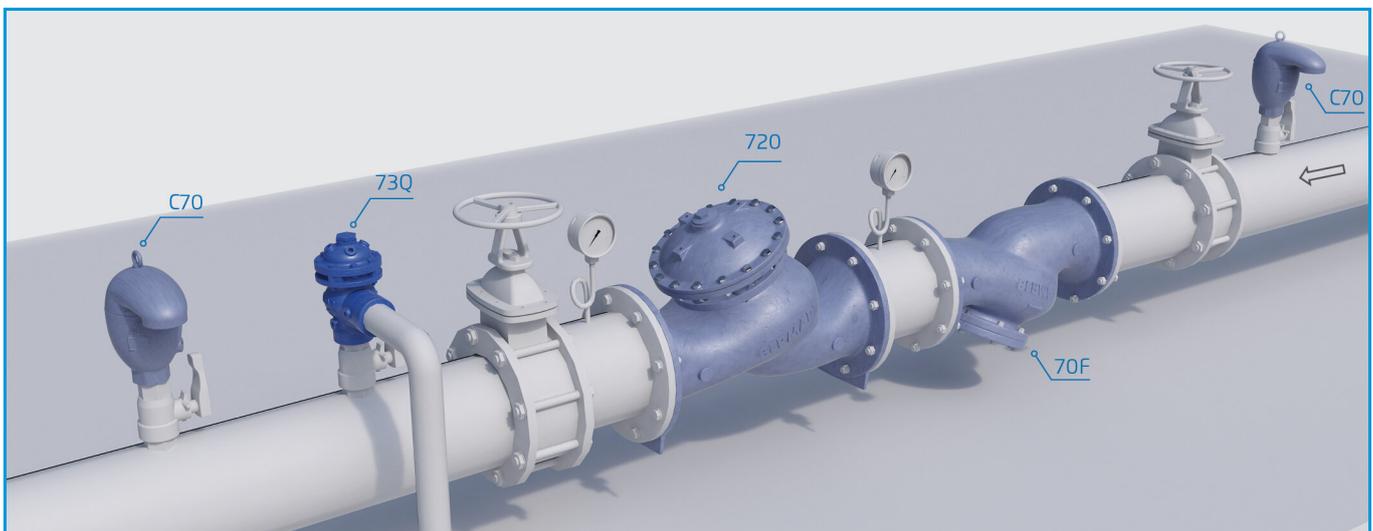

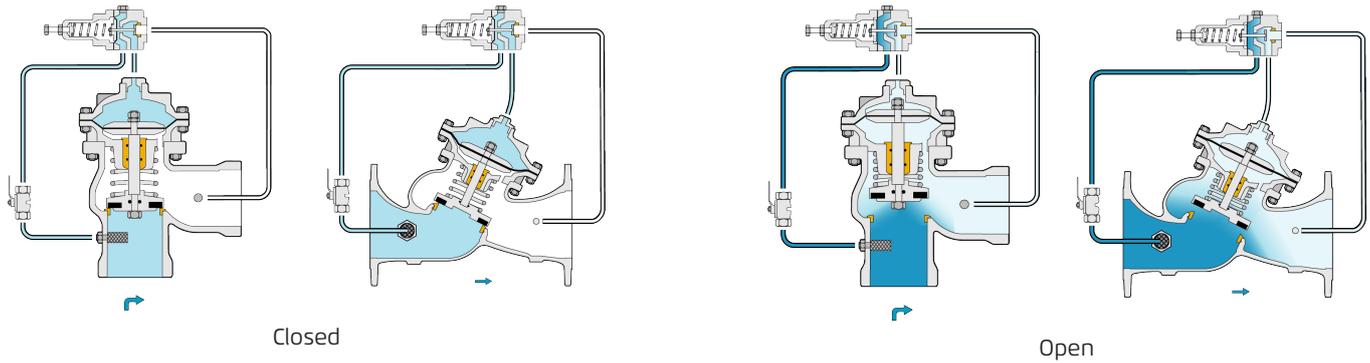

This drawing refers to 1½ – 4"; 40-100 mm sized valves only. For other sizes please refer to the Model's IOM.

Main Valve

Size Range: 1½"-24"; DN40-600

Pattern: "Y" (globe) & "A" (angle)

Pressure Rating: 16 bar; 25 bar

End Connection: Flanged, Threaded, Grooved

Temperature Rating: 80°C

For 60–80°C consult factory

Standard Materials:

Body & Cover: Ductile Iron

Bolts, Nuts & Studs: Stainless Steel

Internals: Stainless Steel, Tin Bronze, Coated Steel & POM

Diaphragm: Fabric-reinforced synthetic rubber

Seals: Synthetic rubber

Coating: Dark blue Fusion bonded epoxy

For other materials contact BERMAD

Control System

Standard Materials:

Accessories: Stainless Steel, Bronze & Brass

Tubing: Stainless Steel or Copper

Fittings: Stainless Steel or Brass

Pilot standard materials:

Body: Stainless Steel, Bronze & Brass

Elastomers: Synthetic Rubber

Internals and Spring: Stainless Steel

Pilot Options:

Various pilots and calibration springs are available. Select according to valve size and operating conditions. For more details check relevant pilots product pages.

Notes

- Main pipe diameter, pressure rating, flow rate and relief pressure are required for optimal sizing
- Recommended continuous flow velocity: 0.3-15 m/sec; 1-50 ft/sec.

For detailed Engineering & Specification data, IOM and CAD Drawings, visit the Model Page on the [BERMAD](https://www.bermad.com) website.